



LINE HAUL APPLICATIONS

THE MICHELIN® X® LINE ENERGY Z TIRE

Our best just got better. The MICHELIN® X LINE ENERGY Z tire is guaranteed to deliver 20% more mileage vs. leading competitor line haul steer tires⁽¹⁾ and 5% better rolling resistance than the MICHELIN® XZA3® + EVERTREAD® tire it replaces.⁽⁴⁾

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/> Recommended	<input type="checkbox"/> Acceptable	<input type="checkbox"/> Acceptable	<input type="checkbox"/> Acceptable



SmartWay®
Verified

7 Year

**7 YEAR 700,000-MILE (1,130,000 km)
3-RETREAD LIMITED WARRANTY⁽²⁾**



DIRECTIONAL TIRE⁽³⁾
(For 1st Half of Life)

- (1) Please see business.michelinman.com > Toolbox > Reference Documents > Warranty Information & Guarantees for details.
- (2) 7 Year or 700,000 Mile (1,130,000 km) or 3-Retread Manufacturer's Limited Casing Warranty for MICHELIN® X® LINE ENERGY Z tire when retreaded by an authorized Michelin Retread Technologies (MRT) Dealer only. See limited warranty for details.
- (3) Directional tread design (For 1st Half of Life).
- (4) Vs. MICHELIN® XZA3® + EVERTREAD® based on internal rolling resistance tests using ISO 28580 in tire size 275/80R22.5.

business.michelinman.com



MICHELIN

THE MICHELIN® X® LINE ENERGY Z TIRE

Our best just got better. The MICHELIN® X LINE ENERGY Z tire is guaranteed to deliver 20% more mileage vs. leading competitor line haul steer tires⁽¹⁾ and 5% better rolling resistance than the MICHELIN® XZA3®+ EVERTREAD® tire it replaces.⁽⁴⁾

Industry Leading Mileage Guarantee

Guarantee

20% more mileage guaranteed vs leading competitor line haul steer tires.⁽¹⁾

Patented Dual Compound Tread

- Mileage Top Layer – controls tread stiffness and stress to reduce irregular wear
- Ultra-Fuel-Efficiency and Retreadability Bottom Layer – minimizes internal casing temperatures for low rolling resistance and extended casing life

Even Wear

Decoupling groove and directional mini sipes provide even wear.


20% MORE MILEAGE GUARANTEED* ⁽¹⁾

Improved Fuel Efficiency

Ultra Fuel Efficient Casing

- 5% better rolling resistance than the ultra-fuel efficient MICHELIN® XZA3®+ EVERTREAD® tire.⁽⁴⁾

SmartWay® Verified

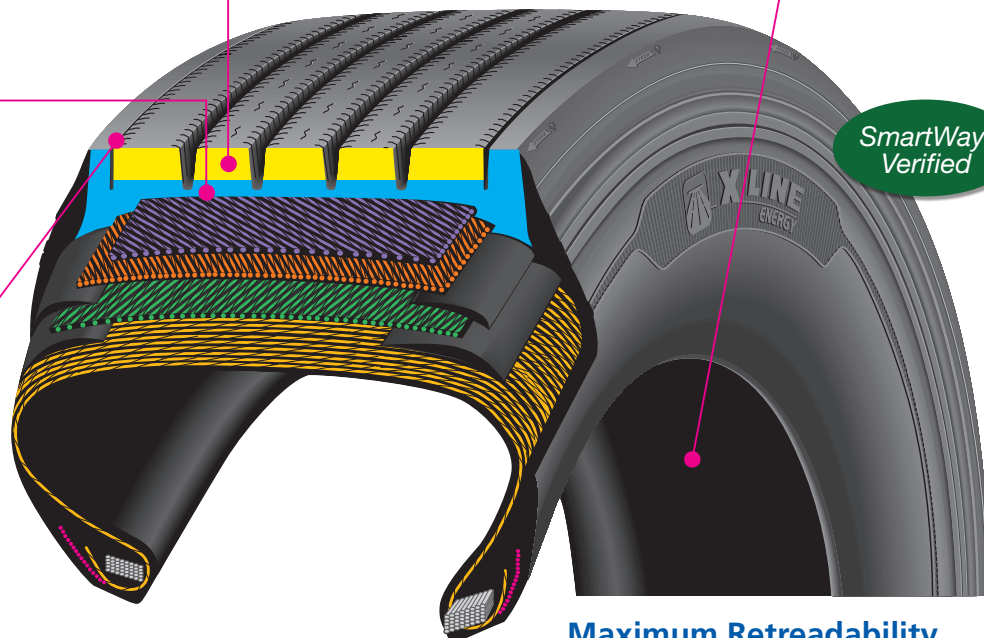

Maximum Retreadability

Line Haul	Regional	Urban	On/Off Road
Recommended	Acceptable		

7 Year

7 YEAR 700,000-MILE (1,130,000 km) 3-RETREAD LIMITED WARRANTY⁽²⁾

DIRECTIONAL TIRE⁽³⁾
(For 1st Half of Life)

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	kph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5 (2,3)	G	03363	19	75	120	19.3	489	41.3	1048	11.2	285	8.25, 7.50	12.5	318	502	6175	105	2800	720	5840	105	2650	720
11R22.5 (2,3)	H	06697	19	75	120	19.1	485	41.3	1048	11.2	285	8.25, 7.50	12.5	318	503	6610	120	3000	830	6005	120	2725	830
275/80R22.5 (2,3)	G	03885	19	75	120	18.6	473	40.1	1018	11.0	280	8.25, 7.50	12.2	311	518	6175	110	2800	760	5675	110	2575	760
275/80R22.5 (2,3)	H	66205	19	75	120	18.7	474	40.1	1018	11.0	280	8.25, 7.50	12.2	311	518	7160	120	3250	830	6610	120	3000	830
11R24.5 (2,3)	H	18748	19	75	120	20.2	513	43.3	1099	11.3	286	8.25, 7.50	12.5	318	479	7160	120	3250	830	6610	120	3000	830
275/80R24.5 (2,3)	H	81281	19	75	120	19.3	491	41.3	1049	10.7	273	8.25, 7.50	12.2	311	501	6780	120	3075	830	6175	120	2800	830

Note: Wheel listed first is the measuring wheel.

(1) Please see business.michelinman.com > Toolbox > Reference Documents > Warranty Information & Guarantees for details.

(2) 7 Year or 700,000 Mile (1,130,000 km) or 3-Retread Manufacturer's Limited Casing Warranty for MICHELIN® X® LINE ENERGY Z tire when retreaded by an authorized Michelin Retread Technologies (MRT) Dealer only. See limited warranty for details.

(3) Directional tread design (For 1st Half of Life).

(4) Vs. MICHELIN® XZA3®+ EVERTREAD® based on internal rolling resistance tests using ISO 28580 in tire size 275/80R22.5.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall width will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelintruck.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE
US: business.michelinman.com
CA: business.michelin.ca

FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

VISIT US ON THE WEB
US: business.michelinman.com/contact-us
CA: business.michelin.ca/contact-us

CONTACT US BY TELEPHONE
US: 1-888-622-2306
CA: 1-888-622-2306

Michelin North America Inc., One Parkway South, Greenville, SC 29615

Michelin North America (Canada) Inc., 2500 Daniel Johnson Blvd., Suite 500, Laval (QC) H7T 2P6

Copyright © 2021 MNA(C)I. All rights reserved.

Copyright © 2021 Michelin North America, Inc. All rights reserved. An Equal Opportunity Employer PDF Only (09/21)