



LINE HAUL APPLICATIONS

# THE MICHELIN® XDA® 5+ TIRE

Designed to be our longest wearing drive tire featuring regenerating tread features that deliver excellent traction late in life for line haul applications.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/> Recommended	<input type="checkbox"/> Acceptable	<input type="checkbox"/>	<input type="checkbox"/>



[business.michelintruck.com](https://business.michelintruck.com)



**MICHELIN**

Designed to be our longest wearing drive tire featuring regenerating tread features that deliver excellent traction late in life for line haul applications.

### Improved Fuel Efficiency<sup>(1)</sup> –

5% rolling resistance improvement over MICHELIN® XDA®5 tire  
 • **Advanced Technology**

### Excellent Mileage –

Leading Tread Life

- **Solid shoulders** – Smooth wear
- **Wide footprint / Square shoulders** – Stability

### Exceptional Handling –


Optimized Traction and Stability

- **Matrix Siping Technology** – Traction and stability
- **Regenerating tread features** – Late life traction

### Extended Casing Life –

Longer life and retreadability

- **Full-width elastic protector ply** – Helps protect the working plies from bruising and penetrations, minimizing downtime.
- **Rectangular bead bundle** – A Michelin exclusive - simulates a solid steel rod “strapping” the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

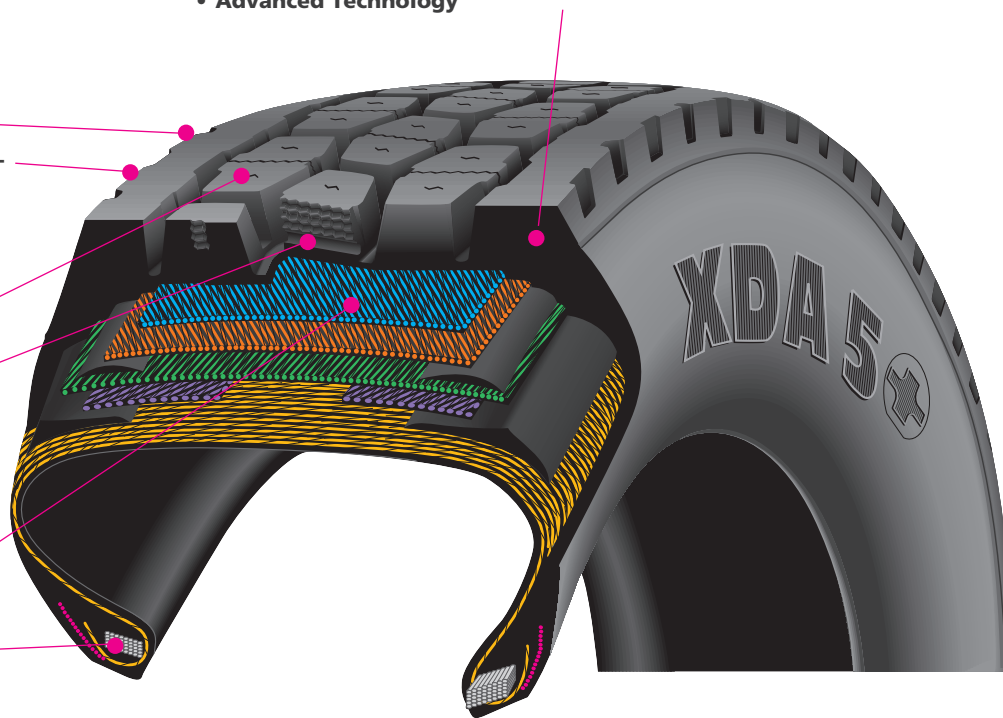

Size	Load Range	Catalog Number	Tread Depth		Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mm	mph	kph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	G	14003	30	75	120	19.5	495	41.7	1058	11.3	287	8.25, 7.50	12.5	318	497	6175	105	2800	720	5840	105	2650	720	
275/80R22.5	G	61310	30	75	120	19.0	483	40.6	1031	11.1	281	8.25, 7.50	12.2	311	510	6175	110	2800	760	5675	110	2575	760	
11R24.5	H	97973	30	75	120	20.6	523	43.8	1113	11.3	287	8.25, 7.50	12.5	318	471	7160	120	3250	830	6610	120	3000	830	
275/80R24.5	G	01376	30	75	120	19.7	499	41.8	1062	10.8	273	8.25, 7.50	12.2	311	494	6175	110	2800	760	5675	110	2575	760	

Note: Wheel listed first is the measuring wheel.

(1) Based on industry standard rolling resistance testing of comparable tires or retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.


(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information.

Please visit [business.michelinman.com](http://business.michelinman.com) for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

 TO FIND OUT MORE  
 US: [business.michelinman.com](http://business.michelinman.com)  
 CA: [business.michelin.ca](http://business.michelin.ca)

 FIND US ON FACEBOOK  
[michelintruck](https://www.facebook.com/michelintruck)

 CONTACT US ON THE WEB  
 US: [business.michelinman.com/contact-us](http://business.michelinman.com/contact-us)  
 CA: [business.michelin.ca/contact-us](http://business.michelin.ca/contact-us)

 CONTACT US BY TELEPHONE  
 US: 1-888-622-2306  
 CA: 1-888-622-2306