

# THE MICHELIN AGILIS CROSSCLIMATE C-METRIC TIRE



The Michelin Agilis CrossClimate C-Metric tire helps businesses deliver their promises thanks to exceptional mileage, durability and wet braking.




**C-METRIC**



## WET BRAKING — NEW

Stops up to 29 feet / 9 meters shorter on wet pavement than four leading competitive C-Metric tires<sup>(1)</sup>


AVERAGE  
DISTANCE  
TO STOP

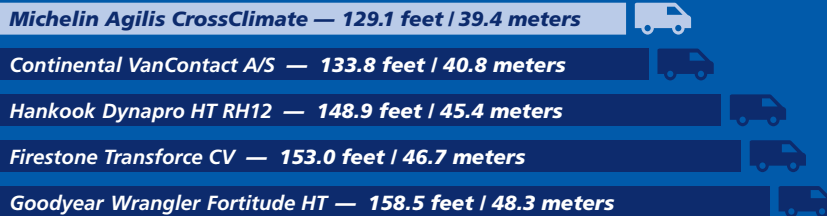

## WET BRAKING — WORN

When worn near the end of treadlife, the Michelin Agilis<sup>®</sup> CrossClimate<sup>®</sup> tire stops up to 44 feet / 13 meters shorter on wet pavement than 3 leading competitor C-Metric tires<sup>(2)</sup>

AVERAGE  
DISTANCE  
TO STOP

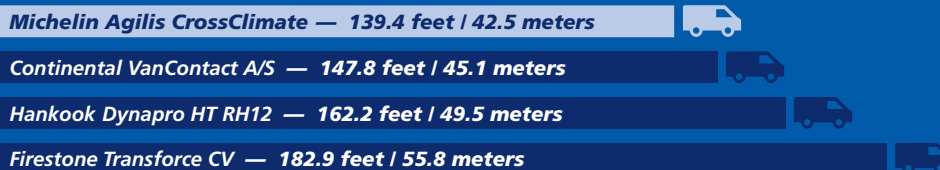

(1) Based on internal wet braking tests from 50 MPH (80 KPH) using tires in size 235/65R16C 121/119R versus the following competitors. Average distance to stop: Michelin Agilis CrossClimate: 129 ft / 39 m, Continental VanContact A/S: 134 ft / 41 m, Firestone Transforce CV: 153 ft / 47 m, Goodyear Wrangler Fortitude HT: 159 ft / 48 m, Hankook Dynapro HT RH12: 149 ft / 45 m. Actual on-road results may vary.

(2) Based on internal wet braking tests from 50 MPH (80 KPH) using tires buffed to 3/32" (2.5mm) remaining tread depth in size 235/65R16C 121/119R versus the following competitors. Average distance to stop: Michelin Agilis CrossClimate: 139 ft / 43 m, Continental VanContact A/S: 148 ft / 45 m, Firestone Transforce CV: 183 ft / 56 m, Hankook Dynapro HT RH12: 162 ft / 49 m. Actual on-road results may vary.



**MICHELIN**

# MICHELIN'S MOST DURABLE, HEAVY-DUTY LIGHT COMMERCIAL TRUCK TIRE

Built with professional-grade construction including CurbGard™ sidewall protectors that resist curb scrubbing



## SIDEWALL RESULTS AFTER CURB SCRUB TEST<sup>3</sup>



Michelin Agilis CrossClimate C-Metric



Leading competitor

## BUILT FOR C-METRIC APPLICATIONS

C-Metric tires are designed to support the unexpected challenges and everyday stresses of commercial vehicles in fast-paced, urban environments. This tire is adapted to fit several sizes for various jobs.

Size Load/Speed Rating	Load Range	Catalog Number	Tread Depth	Max Speed*		Loaded Radius		Overall Diameter (‡)		Overall Width		Approved Wheels Measuring wheel listed first.	Min. Dual Spacing (‡)		Revs Per Mile (at 45 mph)	Max. Load and Pressure Single				Max. Load and Pressure Dual			
				32nds	mph	km/h	in	mm	in	mm	in.		mm	in		mm	in	mm	lbs.	psi	kg.	kPa	lbs.
185/60R15C 94T	C	39451	12	118*	190*	11.2	285	23.7	602	7.4	188	5.5 (5.5 - 6.0)	-	-	876	1475	54	670	375	-	-	-	-
205/65R15C 102/100T	C	40955	12	118*	190*	11.9	303	25.4	645	8.2	208	6.0 (5.5 - 6.5)	9.2	233	817	1875	54	850	375	1765	54	800	375
195/75R16C 107/105R	D	57046	12	106*	170*	12.9	327	27.4	696	7.7	196	5.5 (5.0 - 6.0)	8.7	220	757	2150	69	975	475	2040	69	925	475
205/75R16C 113/111R	E	10356	12	106*	170*	12.8	326	28.1	714	8.2	208	5.5 (5.5 - 6.0)	9.2	233	740	2535	76	1150	525	2405	76	1090	525
225/75R16C 121/120R	E	41578	12	106*	170*	13.7	348	29.3	744	8.7	221	6.0 (6.0 - 7.0)	10.1	256	710	3195	83	1450	575	3085	83	1400	575
235/65R16C 121/119R	E	12816	12	106*	170*	13.1	333	28.0	711	9.4	239	7.0 (6.5 - 7.5)	10.6	270	742	3195	83	1450	575	3000	83	1360	575

With OE and aftermarket fitments, The Michelin Agilis CrossClimate C-Metric tire is ready to help you deliver your promises.

- FORD TRANSIT**
- RAM PROMASTER**
- VOLKSWAGEN CRAFTER**
- NISSAN NV200**
- CHEVROLET CITY EXPRESS**
- MERCEDES-BENZ SPRINTER (SELECT)**

For more details, please visit

US: [Business.MichelinMan.com](https://Business.MichelinMan.com)  
CA: [Business.Michelin.ca](https://Business.Michelin.ca)

(3) Internal curb scrub testing in size 235/65R16C 121/119R on a 2016 Ford Transit van vs. the Continental VanContact A/S. Front left tire of vehicle was run up against a curb continuously at 3-5mph (5-8 kph) for 1960 ft (600 meters) at 164 ft (50 m) intervals. Actual on-road results may vary.  
(\* ) Exceeding the lawful speed limit is neither recommended nor endorsed.  
(‡) Overall width will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

