


MICHELIN X[®] MULTI Z2 19.5 TIRE

REGIONAL
APPLICATIONS



With long miles, rugged traction and a durable casing, this all-position tire keeps regional and urban fleets moving confidently mile after mile.

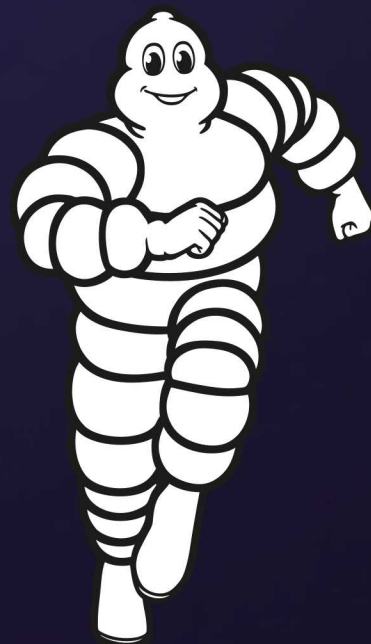

Line Haul	Regional	Urban	On/Off Road
Recommended	Recommended	Acceptable	Acceptable



DIRECTIONAL TIRE
(For 1st Half of Life)



MICHELIN

business.michelinman.com

MICHELIN X® MULTI Z2 19.5 TIRE

With long miles, rugged traction and a durable casing, this all-position tire keeps regional and urban fleets moving confidently mile after mile.

COST CONTROL

Designed to deliver more miles vs X Multi Z 19.5 with lower rolling resistance.

- Regenion – compact sculpture
- Forcion – more cohesive = more miles and long, even wear
- Lower fuel cost from improved rolling resistance



Michelin Forcion uses a revolutionary rubber compound to enhance tire mileage.

DURABILITY

Robust, retreadable casing.

- Sidewall Wear Indicators – Promote timely rotation for long casing life
- Forcion – chip and cut resistance
- Duracoil – reinforced bead



Sidewall Wear Indicators




Michelin Duracoil introduces a reinforced bead for greater durability and robustness.

TRACTION

Keeps you moving, new and worn.

- Regenion – evolving tread design for long lasting grip
- 3 Peak Mountain Snowflake (3PMSF) – this symbol certifies that a tire meets severe snow service requirements through standardized testing.

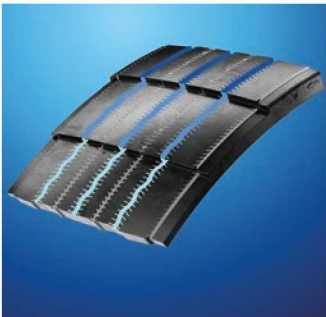

Regenion Technology

- Evolving tread design allows for efficient use of rubber maximizing the wear life of the tire.
- As the tire wears the grooves open up providing lasting traction and control in all-weather conditions.

Size	Load Range	Catalog Number	Tread Depth	Max Speed*		Loaded Radius		Overall Diameter		Overall Width**		Approved Wheels (Measuring wheel listed first)	Min. Dual Spacing**		Revs Per Mile	Max. Load & Pressure Single				Max. Load & Pressure Dual			
			32nds	mph	kn/h	in.	mm	in.	mm	in.	mm		in.	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
265/70R19.5	G	77617	15	81	130	15.7	399	33.9	862	10.4	264	7.5, 6.75, 8.25	11.6	295	612	5510	112	2500	775	5205	112	2360	775
285/70R19.5	J	57132	16	75	120	16.3	413	35.2	895	11.0	280	8.25, 7.5, 9.0	12.5	317	590	6940	130	3150	900	6610	130	3000	900

Note: Wheel listed first is the measuring wheel.

* Exceeding the lawful speed limit is neither recommended nor endorsed.

** Overall width will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

Michelin tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelintruck.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

business.michelinman.com

Michelin North America Inc., One Parkway South, Greenville, SC 29615
Michelin North America (Canada) Inc., 2500 Daniel Johnson Blvd., Suite 500, Laval (QC) H7T 2P6

Copyright © 2025 Michelin North America, Inc. All rights reserved. | © 2025 MNA(CI). All rights reserved.
The Michelin Man is a registered trademark owned by Michelin. | Specifications subject to change without notice.
An Equal Opportunity Employer | PDF Only (BWA 11/25)

